

MULTI SPLIT

SERIES



SELECTION

Choose from types of indoor units and outdoor units that can run up to six indoor units each. Create the system that best matches room shapes and number of rooms.

R32 INDOOR UNITS		R32 OUTDOOR UNITS	
Wall-mounted MSZ-LN (18-25-35-50) MSZ-EF MSZ-AP25-50 MSZ-AP60VG MSZ-AP15-20 MSZ-BT Cassette SLZ MLZ-KP	Floor-standing MFZ-KT Ceiling-suspended PCA Ceiling-concealed SEZ PEAD	2-port up to 2 indoor units MXZ-2F33VF3 MXZ-2F42VF3 MXZ-2F53VF(H)3	3-port up to 3 indoor units MXZ-3F54VF3 MXZ-3F68VF3 4-port up to 4 indoor units MXZ-4F72VF3 MXZ-4F80VF3

R410A INDOOR UNITS		R410A OUTDOOR UNITS		
Wall-mounted MSZ-LN (25-35) MSZ-FH MSZ-EF MSZ-AP25-50 MSZ-AP15-20 MSZ-SF25-50 MSZ-SF15-20 MSZ-GF	Floor-standing MFZ-KJ Ceiling-suspended PCA Ceiling-concealed SEZ PEAD	2-port up to 2 indoor units MXZ-2D33VA MXZ-2D42VA2 MXZ-2D53VA(H)2 MXZ-2E53VAHZ	3-port up to 3 indoor units MXZ-3E54VA MXZ-3E68VA	4-port up to 4 indoor units MXZ-4E72VA MXZ-4E83VA MXZ-4E83VAHZ
Cassette MLZ-KP SLZ PLA	5-port up to 5 indoor units MXZ-5E102VA	6-port up to 6 indoor units MXZ-6D122VA2		

CHECK SYSTEM COMPATIBILITY

Possible combinations depends on the outdoor unit chosen. Please check the following points.

Check Indoor Units

Refer to the "Indoor Unit Compatibility Table" to check if the indoor units selected can be used with the outdoor unit selected. (Indoor units not listed in the table cannot be used.)


Check Indoor Unit Capacity Combination

Refer to the "Combination Table" to check if the capacity combination of the indoor unit selected is connectable. (Combinations not listed cannot be connected.)

If the desired combination cannot be found, please change either the indoor or outdoor unit to match one of the combinations shown in the tables.

MXZ SERIES

Advancements in the MXZ Series include efficiency and flexibility in system expansion capabilities. The best solution when requiring multi-system air conditioning needs.

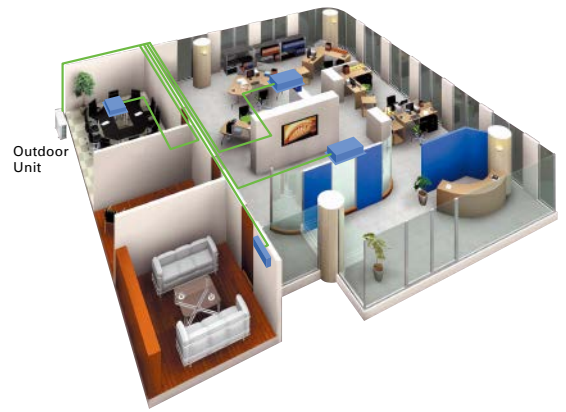

R32

2-port

MXZ-2F33VF3
MXZ-2F42VF3
MXZ-2F53VF(H)3




R32

3-port 4-port

MXZ-3F54VF3
MXZ-3F68VF3
MXZ-4F72VF3
MXZ-4F80VF3

EXAMPLE SYSTEM

MXZ-4F72VF system

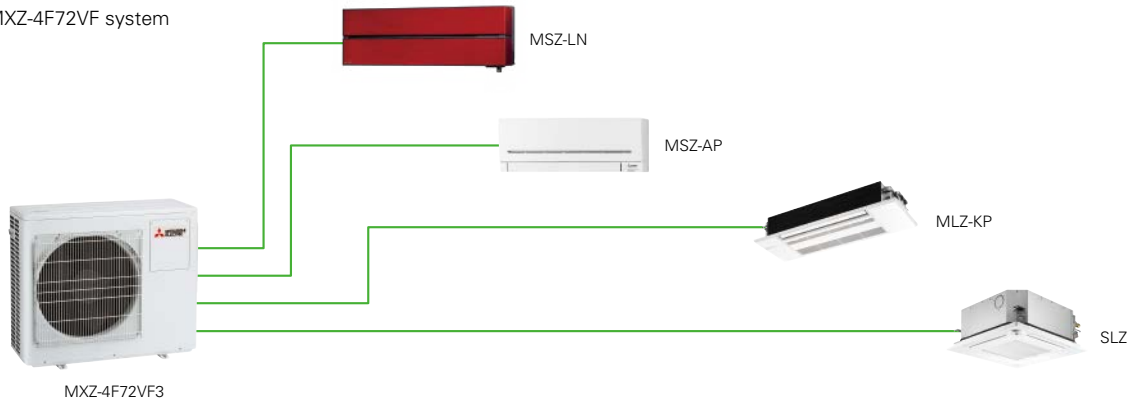

No necessity for refrigerant charging

Depending on the pipe length and the indoor units that are connected, conventional models have required refrigerant charging, but no R32 MXZ model needs to be charged with additional refrigerant. This eliminates troublesome work at the site of installation, and reduces the amount of additional work for the installer.

Handle Up to 4 Rooms with a Single Outdoor Unit


The MXZ Series for R32 offers a seven-system line-up to choose from, ranging between 3.3 and 8.0kW. All of them are compatible with specific M, S and P series indoor units. A single outdoor unit can handle a wide range of building layouts.

Support Functions

Wiring/Piping Correction Function* (3F54/3F68/4F72/4F80)

Simply press a single button to confirm if wiring and piping are properly connected. Wiring errors are corrected automatically when discovered. This eliminates the need to confirm complicated wiring connections when expanding the system. (For details, refer to the outdoor unit installation manual.)

* Function cannot be used when the outdoor temperature is below 0°C. The correction process requires 10–20 minutes to complete and must be conducted with the unit set to the "Cooling" mode.

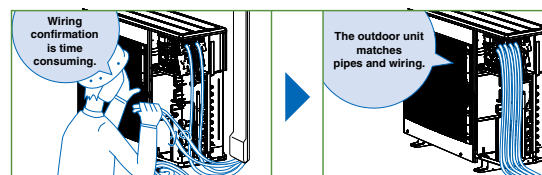

Operation Lock

To accommodate specific use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service. (For details, refer to the outdoor unit installation manual.)



Type (Inverter Multi - Split Heat Pump)			Up to 2 Indoor Units				Up to 3 Indoor Units		Up to 4 Indoor Units		
Indoor Unit			Please refer to *4								
Outdoor Unit			MXZ-2F33VF3	MXZ-2F42VF3	MXZ-2F53VF3	MXZ-2F53VFH3	MXZ-3F54VF3	MXZ-3F68VF3	MXZ-4F72VF3	MXZ-4F80VF3	
Refrigerant			R32*1								
Power Source			Outdoor power supply								
Supply Outdoor (V/Phase/Hz)			220 - 230 - 240V / Single / 50Hz								
Cooling	Capacity	Rated	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.0
	Input	Rated	kW	0.85	0.98	1.40	1.40	1.32	1.84	1.85	2.25
	EER*4			3.88	4.29	3.79	3.79	4.10	3.70	3.89	3.56
	Design Load		kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.0
	Annual Electricity Consumption*2		kWh/a	189	169	216	216	222	301	311	368
SEER*4				6.1	8.7	8.6	8.6	8.5	7.9	8.1	7.6
	Energy Efficiency Class*4			A++	A+++	A+++	A+++	A+++	A++	A++	A++
Heating (Average Season)	Capacity	Rated	kW	4.0	4.5	6.4	6.4	7.0	8.6	8.6	8.8
	Input	Rated	kW	0.91	0.88	1.56	1.56	1.40	1.91	1.87	2.00
	COP*4			4.40	5.11	4.10	4.10	5.00	4.50	4.60	4.40
	Design Load		kW	2.7	3.5	3.5	3.5	5.2	6.8	7.0	7.0
	Declared Capacity	at reference design temperature	kW	2.2	2.7	2.7	2.7	4.2	5.7	5.6	5.6
		at bivalent temperature	kW	2.4	2.9	2.9	2.9	4.7	6.4	6.2	6.2
		at operation limit temperature	kW	1.6	2.3	2.3	2.1	3.2	4.6	4.8	4.8
	Back Up Heating Capacity		kW	0.5	0.8	0.8	0.8	1.0	1.1	1.4	1.4
	Annual Electricity Consumption*2		kWh/a	944	1065	1065	1089	1583	2321	2389	2389
	SCOP*4			4.0	4.6	4.6	4.5	4.6	4.1	4.1	4.1
	Energy Efficiency Class*4			A+	A++	A++	A+	A++	A+	A+	
Operating Current (max)	A		10.0	12.2	12.2	12.2	18.0	18.0	18.0	18.0	
Outdoor Unit	Dimensions	H x W x D	mm	550 - 800 (+69) - 285 (+59.5)				710 - 840 (+30) - 330 (+66)			
	Weight		kg	33	37	37	38	58	58	59	59
	Air Volume	Cooling	m ³ /min	31.5	28.4	32.7	32.7	31	35.4	35.4	40.3
		Heating	m ³ /min	32.3	33.5	34.7	34.7	31	39.6	42.7	44.1
	Sound Level (SPL)	Cooling	dB(A)	49	44	46	46	46	48	48	50
		Heating	dB(A)	50	50	51	51	50	53	54	55
	Sound Level (PWL)	Cooling	dB(A)	60	59	61	61	60	63	63	65
		Heating	dB(A)	60	59	61	61	60	63	63	65
	Operating Current	Cooling	A	4.3 - 4.1 - 3.9	4.9 - 4.7 - 4.5	6.5 - 6.2 - 6.0	6.5 - 6.2 - 6.0	6.0 - 5.7 - 5.5	8.4 - 8.0 - 7.7	8.5 - 8.1 - 7.8	10.3 - 9.9 - 9.5
		Heating	A	4.6 - 4.4 - 4.2	4.4 - 4.3 - 4.1	7.5 - 7.1 - 6.8	7.5 - 7.1 - 6.8	6.4 - 6.1 - 5.9	8.8 - 8.4 - 8.0	8.6 - 8.2 - 7.9	9.2 - 8.8 - 8.4
Breaker Size	A		15	15	15	15	25	25	25	25	
Ext. Piping	Port Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2	6.35 x 2 / 9.52 x 2	6.35 x 2 / 9.52 x 2	6.35 x 2 / 9.52 x 2	6.35 x 3 / 9.52 x 3	6.35 x 3 / 9.52 x 3	6.35 x 4 / 12.7 x 1 + 9.52 x 3	
	Total Piping Length (max)		m	20	30	30	30	50	60	60	
	Each Indoor Unit Piping Length (max)		m	15	20	20	20	25	25	25	
	Max. Height		m	10	15(15)*3	15(15)*3	15(15)*3	15(15)*3	15(15)*3	15(15)*3	
	Chargeless Length		m	20	30	30	30	50	60	60	
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ +46								
	Heating	°C	-15 ~ +24								

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 560. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 560 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 15m.

*4 EER/COP, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.
 MXZ-2F33VF3 MSZ-AP15VG + MSZ-LN18VG2
 MXZ-2F42VF3 MSZ-LN18VG2 + MSZ-LN25VG2
 MXZ-2F53VF(H)3 MSZ-LN18VG2 + MSZ-LN35VG2
 MXZ-3F54VF3 MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2
 MXZ-3F68VF3 MSZ-LN18VG2 + MSZ-LN25VG2 + MSZ-LN25VG2
 MXZ-4F72VF3 MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2
 MXZ-4F80VF3 MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2

MXZ SERIES

Advancements in the MXZ Series include efficiency and flexibility in system expansion capabilities. The best solution when requiring multi-system air conditioning needs.



R410A

2-port

MXZ-2D33VA
MXZ-2D42VA2
MXZ-2D53VA (H)2



R410A

3-port 4-port

MXZ-3E54VA
MXZ-3E68VA
MXZ-4E72VA



R410A

4-port 5-port

MXZ-4E83VA
MXZ-5E102VA



R410A

6-port

MXZ-6D122VA2

EXAMPLE SYSTEM

MXZ-6D122VA2 system



Handle Up to 6 Rooms with a Single Outdoor Unit


The MXZ Series offers a nine-system line-up to choose from, ranging between 3.3 and 12.2kW. All of them are compatible with specific M, S and P series indoor units. A single outdoor unit can handle a wide range of building layouts.

Support Functions

Wiring/Piping Correction Function* (3E54/3E68/4E72/4E83/5E102/6D122)

Simply press a single button to confirm if wiring and piping are properly connected. Wiring errors are corrected automatically when discovered. This eliminates the need to confirm complicated wiring connections when expanding the system. (For details, refer to the outdoor unit installation manual.)

* Function cannot be used when the outdoor temperature is below 0°C. The correction process requires 10–20 minutes to complete and must be conducted with the unit set to the "Cooling" mode.

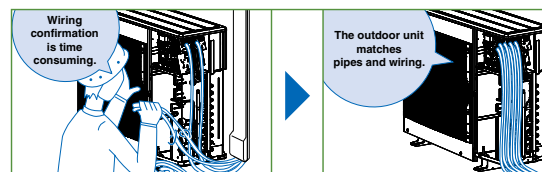

Ampere Limit Adjustment*

(4E83/5E102/6D122)

Dipswitch settings can be used to adjust the maximum electrical current for operation. This function is highly recommended for managing energy costs. (For details, refer to the outdoor unit installation manual.)

* Maximum capacity is lowered with the use of this function.

Operation Lock

To accommodate specific use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service. (For details, refer to the outdoor unit installation manual.)



Type (Inverter Multi - Split Heat Pump)			Up to 2 Indoor Units					Up to 3 Indoor Units		Up to 4 Indoor Units		Up to 5 Indoor Units	
Indoor Unit			Please refer to (*4)										
Outdoor Unit			N: MXZ-2D33VA	N: MXZ-2D42VA2	N: MXZ-2D53VA2	N: MXZ-2D53VAH2	N: MXZ-3E54VA	N: MXZ-3E68VA	N: MXZ-4E72VA	MXZ-4E83VA	MXZ-5E102VA		
Refrigerant			R410A**1										
Power Supply			Outdoor power supply 220 - 230 - 240V / Single / 50										
Cooling	Capacity	Rated	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.3	10.2	
		Min - Max	kW	1.1 - 3.8	1.1 - 4.4	1.1 - 5.6	1.1 - 5.6	2.9 - 6.8	2.9 - 8.4	3.7 - 8.8	3.7 - 9.2	3.9 - 11.0	
	Input (Indoor+Outdoor)	Rated	kW	0.90	1.00	1.54	1.54	1.35	2.19	2.25	2.44	3.15	
	Design Load		kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.3	10.2	
	Annual Electricity Consumption*2		kWh/a	211	216	262	262	295	425	443	460	537	
Heating (Average Season)	Capacity	Rated	kW	4.0	4.5	6.4	6.4	7.0	8.6	8.6	9.3	10.5	
		Min - Max	kW	1.0 - 4.1	1.0 - 4.8	1.0 - 7.0	1.0 - 7.0	2.6 - 9.0	2.6 - 10.6	3.4 - 10.7	3.4 - 11.6	4.1 - 14.0	
	Input (Indoor+Outdoor)	Rated	kW	0.96	0.93	1.70	1.70	1.59	2.38	2.28	2.00	2.34	
	Design Load		kW	2.7	3.2	4.5	4.5	5.0	6.8	7.0	8.7	8.9	
	Declared Capacity	at reference design temperature	kW	2.1	2.7	3.7	3.6	4.0	5.4	5.6	7.1	7.3	
Max. Operating Current (Indoor+Outdoor)	Capacity	at bivalent temperature	kW	2.4	3.0	4.0	4.0	4.49	6.0	6.2	7.8	7.9	
		at operation limit temperature	kW	1.7	2.3	3.3	3.0	3.17	4.4	4.7	6.0	6.3	
	Back Up Heating Capacity		kW	0.6	0.5	0.8	0.9	1.0	1.4	1.4	1.6	1.6	
	Annual Electricity Consumption*2		kWh/a	926	1065	1507	1546	1751	2466	2516	2889	2958	
	SCOP**4			4.1	4.2	4.2	4.1	4.0	3.9	3.9	4.2	4.2	
	Energy Efficiency Class**4			A	A+	A+	A+	A+	A	A	A+	A+	
				A	A+	A+	A+	A+	A	A	A+	A+	
	Outdoor Unit	Dimensions	H x W x D	mm	550 - 800(+69) - 285(+59.5)				710 - 840(+30) - 330(+66)		796 - 950 - 330		
		Weight		kg	32	37	37	38	58	58	59	63	64
			Air Volume	Cooling	m ³ /min	32.9	27.7	32.9	32.9	42.1	42.1	42.1	55.6
Sound Level (SPL)		Heating	m ³ /min	33.7	33.3	33.3	33.3	43.0	43.0	43.0	55.6	68.0	
		Cooling	dB(A)	49	46	50	50	50	50	50	49	52	
Sound Level (PWL)		Heating	dB(A)	50	51	53	53	53	53	53	51	56	
		Cooling	dB(A)	63	60	64	64	64	64	64	61	65	
Breaker Size			A	10	15	15	15	25	25	25	25	25	
Ext. Piping		Diameter	Liquid	mm	6.35 x 2	6.35 x 2	6.35 x 2	6.35 x 2	6.35 x 3	6.35 x 3	6.35 x 4	6.35 x 4	6.35 x 5
			Gas	mm	9.52 x 2	9.52 x 2	9.52 x 2	9.52 x 2	9.52 x 3	9.52 x 3	12.7x1+9.52x3	12.7x1+9.52x3	12.7x1+9.52x4
	Total Piping Length (max)	m	20	30	30	30	50	60	60	70	80		
	Each Indoor Unit Piping Length (max)	m	15	20	20	20	25	25	25	25	25		
	Max. Height	m	10	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3		
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46		
	Heating	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-20 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24		

N: Please refer to the NOTE below.

Type (Inverter Multi - Split Heat Pump)			Up to 6 Indoor Units						
Indoor Unit			Please refer to (*5)						
Outdoor Unit			MXZ-6D122VA2						
Refrigerant			R410A**1						
Power Supply			Outdoor power supply 220 - 230 - 240V / Single / 50						
Cooling	Capacity	Rated	kW	12.2					
		Min - Max	kW	3.5 - 13.5					
	Input**5	Rated	kW	3.66					
	EER**6			3.33					
	EEL Rank			A					
			A						
Heating	Capacity	Rated	kW	14.0					
		Min - Max	kW	3.5 - 16.5					
	Input**5	Rated	kW	3.31					
	COP**6			4.23					
	EEL Rank			A					
			A						
Operating Current (max)**5			A	26.8					
Outdoor Unit	Dimensions	H x W x D	mm	1048 - 950 - 330					
	Weight		kg	88					
		Air Volume	Cooling	m ³ /min	63.0				
	Sound Level (SPL)	Heating	m ³ /min	77.0					
		Cooling	dB(A)	55					
	Sound Level (PWL)	Heating	dB(A)	57					
		Cooling	dB(A)	70					
	Breaker Size		A	32					
	Ext. Piping	Diameter	Liquid	mm	6.35 x 6				
			Gas	mm	12.7x1+9.52x5				
Total Piping Length (max)		m	80						
Each Indoor Unit Piping Length (max)		m	25						
Max. Height		m	15 (10)*3						
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ +46						
	Heating	°C	-15 ~ +24						

NOTE

When connecting the MFZ-KJ series indoor unit(s) to this outdoor unit, charge additional refrigerant according to the instructions in the diagram below.

MXZ-2D33VA

No. of MFZ-KJ indoor units	Pipe length (L)		Maximum amount of refrigerant
	~20m		
1 unit	100g additional (Total 1250g)		1250g
2 units	Not available (Only one MFZ-KJ series indoor unit can be connected.)		

MXZ-2D42VA2 MXZ-2D53VA2 MXZ-2D53VAH2

No. of MFZ-KJ indoor units	Pipe length (L)		Maximum amount of refrigerant
	~20m		
1 unit	100g additional (Total 1400g)	100g+{(L-20)m x 20g/m}	1600g
2 units	200g additional (Total 1500g)	200g+{(L-20)m x 20g/m}	1700g

MXZ-3E54VA

No. of MFZ-KJ indoor units	Pipe length (L)		Maximum amount of refrigerant
	~40m		
1 unit	100g additional (Total 2800g)	100g+{(L-40)m x 20g/m}	3000g
2 units	200g additional (Total 2900g)	200g+{(L-40)m x 20g/m}	3100g
3 units	300g additional (Total 3000g)	300g+{(L-40)m x 20g/m}	3200g

MXZ-3E68VA MXZ-4E72VA

No. of MFZ-KJ indoor units	Pipe length (L)		Maximum amount of refrigerant
	~40m		
1 unit	100g additional (Total 2800g)	100g+{(L-40)m x 20g/m}	3200g
2 units	200g additional (Total 2900g)	200g+{(L-40)m x 20g/m}	3300g
3 units	300g additional (Total 3000g)	300g+{(L-40)m x 20g/m}	3400g

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10m.

*4 EER/COP, EEL rank, SEER/SCOP values and energy efficiency class are measured

when connected to the indoor units listed below.

MXZ-2D33VA → MSZ-SF15VA + MSZ-EF18VE
 MXZ-2D42VA2 → MSZ-EF18VE + MSZ-EF25VE
 MXZ-2D53VA(H)2 → MSZ-EF18VE + MSZ-EF35VE
 MXZ-3E54VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE
 MXZ-3E68VA → MSZ-EF18VE + MSZ-EF25VE + MSZ-EF25VE
 MXZ-4E72VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE
 MXZ-4E83VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF22VE + MSZ-EF25VE
 MXZ-5E102VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF22VE + MSZ-EF22VE

*5 Power input and operating current (max) figures are for outdoor unit only

*6 EER/COP, EEL rank, values and energy efficiency class are measured

when connected to the indoor units listed below.

MXZ-6D122VA2 → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF25VE + MSZ-EF25VE

MXZ-HA SERIES

Multi-port outdoor units exclusively for MSZ-HR indoor units.



R32

2-port

MXZ-2HA40VF
MXZ-2HA50VF



R32

3-port

MXZ-3HA50VF

Stylish Design with Flat Panel Front


A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.




Easy to create various combinations

Wide range of simple combinations only possible using multi-port outdoor units.


Two bedrooms

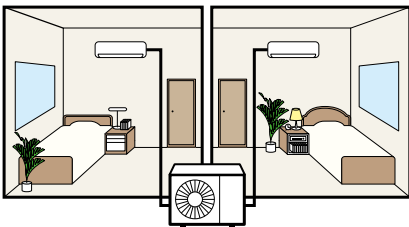


Three bedrooms

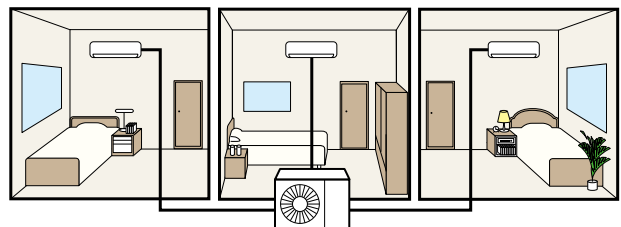

Living room and one bedroom

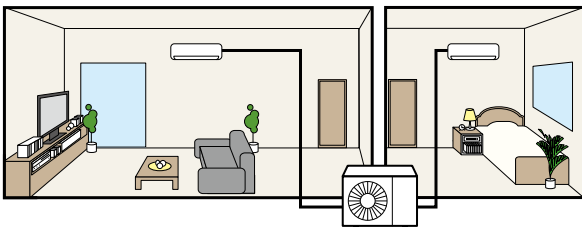

Wide living room

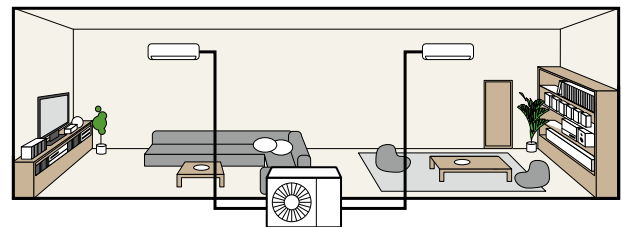

MXZ-HA SERIES

INVERTER MULTI



Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units		Up to 3 Indoor Units		
Indoor Unit				Please refer to (*4)				
Outdoor Unit				MXZ-2HA40VF	MXZ-2HA50VF	MXZ-3HA50VF		
Refrigerant				R32*1				
Power Source				Outdoor power supply				
Supply Outdoor (V/Phase/Hz)				220-230-240 / Single / 50				
Cooling	Capacity	Rated	kW	4.0	5.0	5.0		
	Input*4	Rated	kW	1.05	1.52	1.26		
	EER*4			3.81	3.29	3.97		
		EEL Rank*4		A	A	A		
	Design Load		kW	4.0	5.0	5.0		
	Annual Electricity Consumption*2		kWh/a	172	225	241		
	SEER*4			8.12	7.78	7.26		
		Energy Efficiency Class*4		A++	A++	A++		
	Heating (Average Season)	Capacity	Rated	kW	4.3	6.0	6.0	
		Input	Rated	kW	0.91	1.54	1.30	
COP*4				4.73	3.90	4.62		
		EEL Rank*4		A	A	A		
Design Load			kW	3.2	3.2	4.0		
Declared Capacity		at reference design temperature		kW	2.4	2.4	3.0	
		at bivalent temperature		kW	2.9	2.9	3.6	
		at operation limit temperature		kW	2.1	2.1	2.6	
Back Up Heating Capacity			kW	0.8	0.8	1.0		
Annual Electricity Consumption*2			kWh/a	1043	1043	1394		
SCOP*4			4.30	4.30	4.02			
	Energy Efficiency Class*4		A+	A+	A+			
Operating Current (max)				A	12.2	18.0		
Outdoor Unit	Dimensions	H x W x D	mm	550 - 800 (+69) - 285 (+59.5)		710 - 840 (+30) - 330 (+66)		
	Weight		kg	37		57		
	Air Volume	Cooling		m ³ /min	28.4		31.0	
		Heating		m ³ /min	33.5		29.1	
	Sound Level (SPL)	Cooling		dB(A)	44		46	
		Heating		dB(A)	50		50	
	Sound Level (PWL)	Cooling		dB(A)	59		61	
		Heating		dB(A)	4.9		5.6	
	Operating Current	Cooling		A	4.6		5.8	
		Heating		A	15		25	
Breaker Size		A	15		25			
Ext. Piping	Port Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2		6.35 x 3 / 9.52 x 3		
	Total Piping Length (max)		m	30		50		
	Each Indoor Unit Piping Length (max)		m	20		25		
	Max. Height		m	15 (10)*3		15 (10)*3		
	Chargeless Length		m	30		40		
Guaranteed Operating Range [Outdoor]	Cooling		°C	-10 ~ +46				
	Heating		°C	-15 ~ +24				

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max height is reduced to 10m.

*4 EER/COP, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2HA40VF MSZ-HR25VF + MSZ-HR25VF
 MXZ-2HA50VF MSZ-HR25VF + MSZ-HR25VF
 MXZ-3HA50VF MSZ-HR25VF + MSZ-HR25VF + MSZ-HR25VF

MXZ-DM SERIES

Multi-port outdoor units exclusively for MSZ-HJ and DM indoor units.



R410A

2-port

MXZ-2DM40VA



R410A

3-port

MXZ-3DM50VA

Stylish Design with Flat Panel Front


A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.




Easy to create various combinations

Wide range of simple combinations only possible using multi-port outdoor units.


Two bedrooms

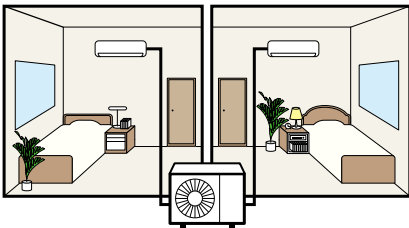


Three bedrooms

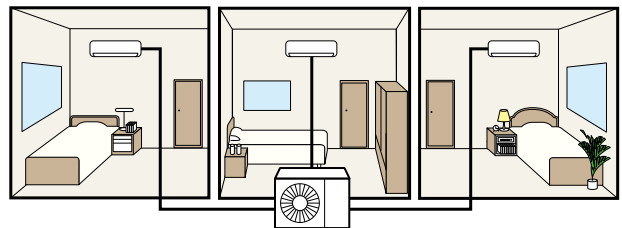

Living room and one bedroom

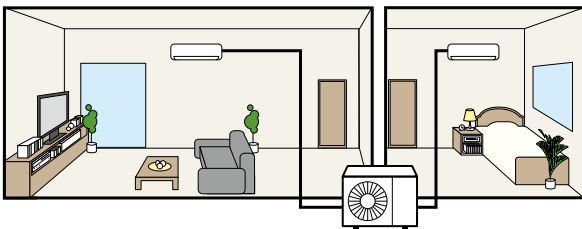

Wide living room

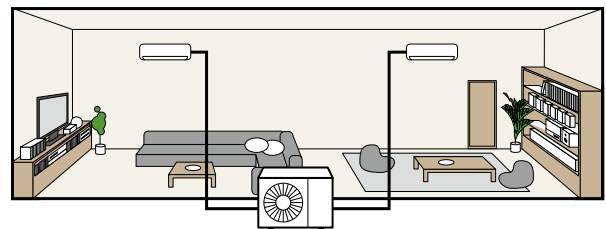


Attention MXZ-DM is exclusively for connection to MSZ-HJ and DM. Please check to make sure that wiring is done correctly.

For MXZ-DM

MSZ-HJ/DM


MXZ-2DM
MXZ-3DM

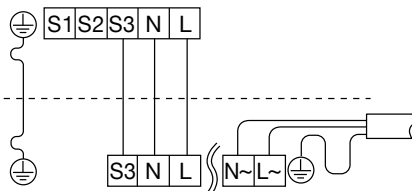

For MSZ-HJ/DM / MUZ-HJ/DM

MSZ-HJ/DM

MUZ-HJ/DM



MXZ-DM SERIES

INVERTER MULTI



Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units		Up to 3 Indoor Units		
Indoor Unit						Please refer to (*4)		
Outdoor Unit				MXZ-2DM40VA		MXZ-3DM50VA		
Refrigerant				R410A*1				
Power Source				Outdoor power supply				
Supply Outdoor (V/Phase/Hz)				230 / Single / 50				
Cooling	Capacity	Rated	kW	4.0		5.0		
	Input*4	Rated	kW	1.05		1.13		
	EER*4			3.81		4.42		
		EEL Rank*4		A		A		
	Design Load		kW	4.0		5.0		
	Annual Electricity Consumption*2		kWh/a	226		283		
	SEER*4			6.1		6.1		
		Energy Efficiency Class*4		A++		A++		
	Heating (Average Season)	Capacity	Rated	kW	4.3		6.0	
		Input	Rated	kW	1.16		1.31	
COP*4				3.71		4.58		
		EEL Rank*4		A		A		
Design Load			kW	3.2		4.0		
Declared Capacity		at reference design temperature		kW	2.73		3.34	
		at bivalent temperature		kW	3.01		3.73	
		at operation limit temperature		kW	2.27		2.70	
Back Up Heating Capacity			kW	0.47		0.66		
Annual Electricity Consumption*2			kWh/a	1105		1455		
SCOP*4			4.0		3.8			
	Energy Efficiency Class*4		A+		A			
Operating Current (max)				A		18.0		
Outdoor Unit	Dimensions	H x W x D	mm	550 - 800 (+69) - 285 (+59.5)		710 - 840 (+30) - 330 (+66)		
	Weight		kg	32		57		
	Air Volume	Cooling		m ³ /min	29.2		37.5	
		Heating		m ³ /min	31.9		39.6	
	Sound Level (SPL)	Cooling		dB(A)	48		50	
		Heating		dB(A)	52		53	
	Sound Level (PWL)	Cooling		dB(A)	63		64	
	Operating Current	Cooling		A	5.1		5.0	
		Heating		A	5.6		5.8	
	Breaker Size		A	15		25		
Ext. Piping	Port Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2		6.35 x 3 / 9.52 x 3		
	Total Piping Length (max)		m	30		50		
	Each Indoor Unit Piping Length (max)		m	20		25		
	Max. Height		m	15 (10)*3		15 (10)*3		
	Chargeless Length		m	20		40		
Guaranteed Operating Range [Outdoor]	Cooling		°C	-10 ~ +46				
	Heating		°C	-15 ~ +24				

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max height is reduced to 10m.

*4 EER/COP, EEL rank, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2DM40VA MSZ-DM25VA + MSZ-DM25VA

MXZ-3DM50VA MSZ-DM25VA + MSZ-DM25VA + MSZ-DM25VA

PUMY-SP SERIES




R410A

PUMY-SP112/125/140VKM(-BS)
PUMY-SP112/125/140YKM(-BS)

Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.

EXAMPLE SYSTEM

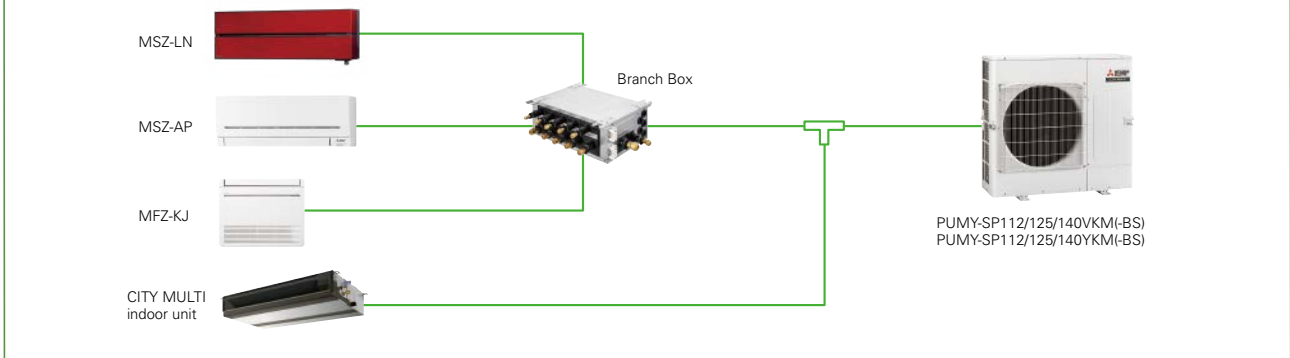

Light weight and compact size

Compact design fits into narrow outdoor unit space of condominiums and offices. Light weight design facilitates easy installation and transportation.



PUMY-P112/125/140YKM4(-BS)

Height 1,338mm
Weight 125kg




PUMY-SP112/125/140YKM(-BS)

Height 981mm **27% reduction**
Weight 94kg **25% reduction**


Unobstructive, compact, and easy to hide from view

Conventional 2-fan type outdoor units may spoil the view. Due to its compact size, the new outdoor fan unit can be installed in locations that would have been inappropriate.




Easy installation and transportation

The reduced weight and height allow for better transportation performance. Carrying and installing become easier.

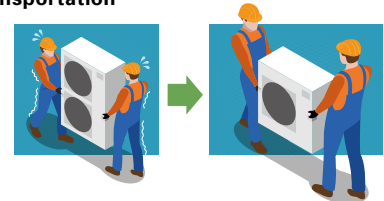

Industry's top energy efficiency*

Even with its compact size and light weight, it has a high EER and COP. Costs are reduced with the industry's best energy saving abilities.

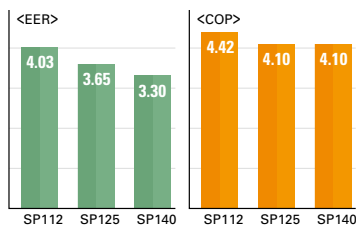

* As of sep.2017.Among VRF outdoor unit of 1fan. (An incompany investigation)

Super silent mode*

Noise level can be reduced up to 10dB(A). This allows you to operate the unit even in the night in a residential zone.

*Capacity reduction differs by mode setting.


*PAC-SC36NA-E is required to activate Super Silent mode.

Rear piping is available

Freedom with layout due to its piping pullout locations in four directions

The in-door unit allows piping from any four directions; front, back, bottom, or right. This enables easier horizontal connection for collective layout.



The out-door unit with an expanded piping layout flexibility greatly improves piping workability.



An external static pressure of 30Pa

The installation location is flexible, thanks to its 30Pa static pressure. You can install it in locations that you could not before.

An external static pressure of 30Pa allows outdoor unit to be installed on balconies in high-rise building or spaces near louvers.



*Noise level will increase when using this function.



Model		PUMY-SP112VKM(-BS)	PUMY-SP125VKM(-BS)	PUMY-SP140VKM(-BS)	PUMY-SP112YKM(-BS)	PUMY-SP125YKM(-BS)	PUMY-SP140YKM(-BS)		
Power Source		1-phase 220 - 230 - 240V 50Hz / 220V 60Hz			3-phase 380 - 400 - 415V 50Hz / 380V 60Hz				
Cooling Capacity (nominal)	*1 kW	12.5	14.0	15.5	12.5	14.0	15.5		
	Power Input kW	3.10	3.84	4.70	3.10	3.84	4.70		
	Current Input A	14.38 - 13.75 - 13.18 / 14.38	17.81 - 17.04 - 16.33 / 17.81	21.80 - 20.85 - 19.88 / 21.80	4.96 - 4.71 - 4.54 / 4.96	6.14 - 5.83 - 5.62 / 6.14	7.52 - 7.14 - 6.88 / 7.52		
	EER kW/kW	4.03	3.65	3.30	4.03	3.65	3.30		
Temp. Range of Cooling*	Indoor Temp. W.B.	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C		
	Outdoor Temp. D.B.	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C		
Heating Capacity (nominal)	*2 kW	14.0	16.0	16.5	14.0	16.0	16.5		
	Power Input kW	3.17	3.90	4.02	3.17	3.90	4.02		
	Current Input A	14.70 - 14.06 - 13.48 / 14.70	18.09 - 17.30 - 16.58 / 18.09	18.85 - 17.83 - 17.09 / 18.85	5.07 - 4.82 - 4.64 / 5.07	6.24 - 5.93 - 5.71 / 6.24	6.43 - 6.11 - 5.89 / 6.43		
	COP kW/kW	4.42	4.10	4.10	4.42	4.10	4.10		
Temp. Range of Heating	Indoor Temp. D.B.	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C		
	Outdoor Temp. W.B.	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C		
Indoor Unit Connectable	Total Capacity 50 to 130% of outdoor unit capacity								
	Model / Quantity	City Multi	15 - 140 / 9	15 - 140 / 10	15 - 140 / 12	15 - 140 / 9	15 - 140 / 10	15 - 140 / 12	
		Branch Box*9	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	
	Mixed System	Branch Box 1 unit	City Multi	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	
			Branch Box	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	
		Branch Box 2 units	City Multi	15 - 140 / 3 or 2*7	15 - 140 / 3	15 - 140 / 3	15 - 140 / 3 or 2*7	15 - 140 / 3	15 - 140 / 3
			Branch Box	15 - 100 / 7 or 8*7	15 - 100 / 8	15 - 100 / 8	15 - 100 / 7 or 8*7	15 - 100 / 8	15 - 100 / 8
Sound Pressure Level (Cooling / Heating)	dB <A>	52 / 54	53 / 56	54 / 56	52 / 54	53 / 56	54 / 56		
Sound Power Level (Cooling)	dB <A>	72	73	74	72	73	74		
Refrigerant Piping Diameter	Liquid Pipe mm	9.52 Flare							
	Gas Pipe mm	15.88 Flare							
Fan	Type x Quantity	Propeller Fan x 1							
	Air Flow Rate	m³/min	77	83	83	77	83	83	
		L/s	1,283	1,383	1,383	1,283	1,383	1,383	
		cfm	2,719	2,931	2,931	2,719	2,931	2,931	
	Motor Output kW	0.20							
External Static Press. Pa	0 Pa / 30 Pa*8								
Compressor	Type x Quantity	Twin rotary hermetic compressor x 1							
	Starting Method	Inverter							
	Motor Output kW	3.1	3.5	3.7	3.1	3.5	3.7		
External Dimensions (H x W x D)	mm	981x1,050x330 (+40)							
Net Weight	kg (lbs)	93 (205)*5			94 (207)*6				
Pre-Charged Quantity	Weight kg	3.5	3.5	3.5	3.5	3.5	3.5		
	CO ₂ Equivalent t	7.31	7.31	7.31	7.31	7.31	7.31		
Max Added Quantity	Weight kg	9.0	9.0	9.0	9.0	9.0	9.0		
	CO ₂ Equivalent t	18.79	18.79	18.79	18.79	18.79	18.79		

*1, *2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference	External Static Press. (Outdoor Unit)
Cooling	27°C DB / 19°C WB	35°C	7.5m (24 - 9 / 16ft.)	0m (0ft)	0 Pa
Heating	20°C DB	7°C DB / 6°C WB	7.5m (24 - 9 / 16ft.)	0m (0ft)	0 Pa

*3 10 to 52°C; increase of connecting PKFY-P15/P20/P25VBM, PFFY-P20/P25/P32VKM, PFFY-P20/P25/P32VLE(R)M indoor unit and M series indoor unit with connection kit and M series, S series, and P series type indoor unit with branch box.

*4 Up to 11 units when connecting via 2 branch boxes.

*5 94 (207), for PUMY-SP112/125/140VKM-BS

*6 95 (209), for PUMY-SP112/125/140YKM-BS

*7 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable City Multi indoor units are 2.

*8 0 Pa as initial setting

*9 At least 2 indoor units must be connected when using branch box.


Type	Branch Box					
Model Name	PAC-MK53BC	PAC-MK33BC	PAC-MK53BCB	PAC-MK33BCB		
Connectable Number of Indoor Units	Max. 5	Max. 3	Max. 5	Max. 3		
Power Supply	Outdoor power supply, Branch Box / Outdoor separate power supply					
	1-phase, 220 - 230 - 240V, 50Hz					
Total Input	kW 0.003					
Operating Current	A 0.05					
Dimensions	H x W x D mm 170 - 450 - 280					
Weight	kg 7.4, 6.7, 7.0, 6.5					
Piping (diameter)	Branch [Indoor Side]	Liquid mm	6.35 x 5	6.35 x 3	6.35 x 5	6.35 x 3
		Gas mm	9.52 x 4, 12.7 x 1	9.52 x 3	9.52 x 4, 12.7 x 1	9.52 x 3
	Main [Outdoor Side]	Liquid mm	9.52			
		Gas mm	15.88			
Wiring	Connection Method		Flared		Braze	
	to Indoor Unit		3-wire + Earth wire			
to Outdoor Unit		3-wire + Earth wire				

<Branch box compatible table>

Outdoor unit	Branch box	PAC-MK31/51BC(B)	PAC-MK32/52BC(B)	PAC-MK33/53BC(B)
PUMY-SP112/125/140V/YKM.TH(-BS)		✓	N/A	N/A
PUMY-SP112/125/140V/YKMR.TH(-BS)		N/A	N/A	✓

[SP112-140V/YKM(-BS)]

Refrigerant Piping Lengths	Maximum meters	Vertical differentials between units	Maximum meters
Total length	120	Indoor/outdoor (outdoor higher)	50
Maximum allowable length	To City Multi indoor unit: 70	Indoor/outdoor (outdoor lower)	30
	Through Branch box: 80	Indoor/indoor	15*

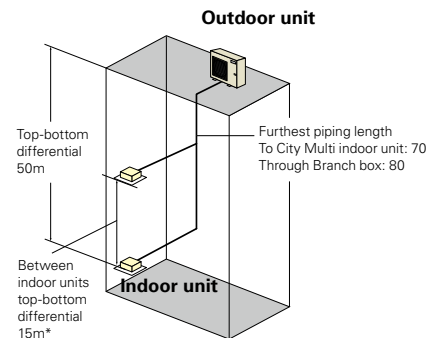

*In case of branch box connection: 12m

PUMY-P SERIES


Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.



R410A

PUMY-P112/125/140VKM4(-BS)
PUMY-P112/125/140YKM(E)4(-BS)
PUMY-P200YKM2(-BS)

EXAMPLE SYSTEM

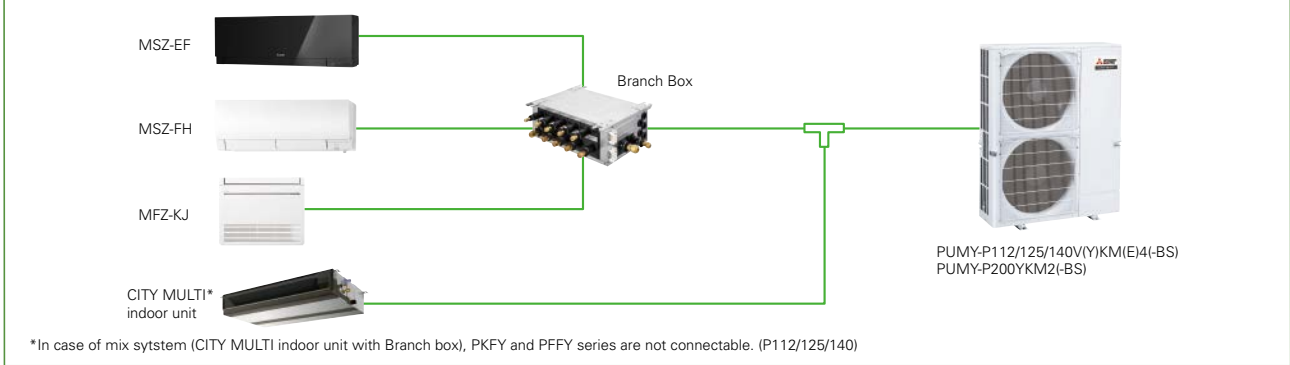


The two-pipe zoned system designed for Heat Pump Operation


PUMY series make use of a two-pipe refrigerant system, which allows for system changeover from cooling to heating, ensuring that a constant indoor climate is maintained in all zones. The compact outdoor unit utilizes R410A refrigerant and an INVERTER-driven compressor to use energy effectively.

With a wide range of indoor unit line-up in connection with a flexible piping system, PUMY series can be configured for all applications. Up to 12 indoor units can be connected with up to 130% connected capacity to maximize engineer's design options. This feature allows easy air conditioning in each area with convenient individual controllers.

Small Offices

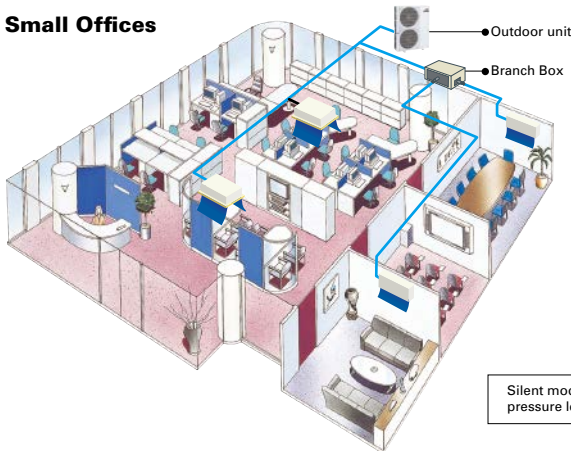

Residence

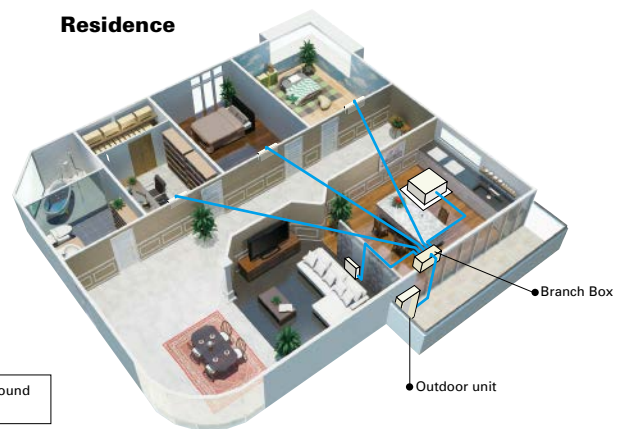

		Maximum Meters				
		Only City Multi ^{*1} Indoor Unit	Only Branch Box Connection	Mixed System (City Multi ^{*1} Indoor Unit + Branch Box)		
P112/125/140	Refrigerant Piping Length	Total Length	300	150	240 (2 Branch boxes) / 300 (1 Branch box)	
		Maximum Allowable Length	150 (175 equivalent)	80	85 (95 equivalent)	80
	Farthest Indoor From First Branch	30	55	30	55	
	Vertical Differentials Between Units	Indoor/Outdoor (Outdoor higher)	50	50	50	
Indoor/Outdoor (Outdoor Lower)		40 ^{*2}	40	40		
Indoor/Indoor		15 ^{*3}	15 ^{*3}	15 ^{*3}		
P200	Refrigerant Piping Length	Total Length	150	150	150	
		Maximum Allowable Length	80 (90 equivalent)	80	80 (90 equivalent)	80
	Farthest Indoor From First Branch	30	55	30	55	
	Vertical Differentials Between Units	Indoor/Outdoor (Outdoor higher)	50	50	50	
Indoor/Outdoor (Outdoor Lower)		40	40	40		
Indoor/Indoor		15 ^{*3}	15 ^{*3}	15 ^{*3}		


*1 Include system with connection kit
*2 In case of including PKFY or PFFY, height between units is 30m.
*3 In case of branch box connection: 12m

30Pa external static pressure* Option (requires PAC-SJ71FM-E)

An external static pressure of 30Pa enables the outdoor unit to be installed on balconies in high-rise building or spaces near louvers.

* PUMY-P112/125/140VKM4(-BS), PUMY-P112/125/140YKM(E)4(-BS) only.
* Noise level will increase when using this function.

30Pa external static pressure fan motor (option)
(PAC-SJ71FM-E)





Model	PUMY-P112VKM4(-BS)			PUMY-P125VKM4(-BS)			PUMY-P140VKM4(-BS)			PUMY-P112YKM4(-BS)			PUMY-P125YKM4(-BS)			PUMY-P140YKM4(-BS)			PUMY-P200YKM2(-BS)				
Power Source	1-phase 220 - 230 - 240V 50Hz									3-phase 380 - 400 - 415V 50Hz													
Cooling Capacity (nominal)	*1 kW	12.5			14.0			15.5			12.5			14.0			15.5			22.4			
	Power Input kW	2.79			3.46			4.52			2.79			3.46			4.52			6.05			
	Current Input A	12.87 - 12.32 - 11.80			15.97 - 15.27 - 14.64			20.86 - 19.95 - 19.12			4.99 - 4.74 - 4.57			5.84 - 5.55 - 5.35			7.23 - 6.87 - 6.62			9.88 - 9.39 - 9.05			
	EER kW/kW	4.48			4.05			3.43			4.48			4.05			3.43			3.70			
Temp. Range of Cooling	Indoor Temp. W.B.	15.0 - 24.0°C			15.0 - 24.0°C			15.0 - 24.0°C			15.0 - 24.0°C			15.0 - 24.0°C			15.0 - 24.0°C			15.0 - 24.0°C			
	Outdoor Temp.*3 D.B.	-5.0 - 52.0°C			-5.0 - 52.0°C			-5.0 - 52.0°C			-5.0 - 52.0°C			-5.0 - 52.0°C			-5.0 - 52.0°C			-5.0 - 52.0°C			
Heating Capacity (nominal)	*2 kW	14.0			16.0			18.0			14.0			16.0			18.0			25.0			
	Power Input kW	3.04			3.74			4.47			3.04			3.74			4.47			5.84			
	Current Input A	14.03 - 13.42 - 12.86			17.26 - 16.51 - 15.82			20.63 - 19.73 - 18.91			5.43 - 5.16 - 4.98			6.31 - 6.00 - 5.78			7.15 - 6.79 - 6.55			9.54 - 9.06 - 8.74			
	COP kW/kW	4.61			4.28			4.03			4.61			4.28			4.03			4.28			
Temp. Range of Heating	Indoor Temp. D.B.	15.0 - 27.0°C			15.0 - 27.0°C			15.0 - 27.0°C			15.0 - 27.0°C			15.0 - 27.0°C			15.0 - 27.0°C			15.0 - 27.0°C			
	Outdoor Temp. W.B.	-20.0 - 15.0°C			-20.0 - 15.0°C			-20.0 - 15.0°C			-20.0 - 15.0°C			-20.0 - 15.0°C			-20.0 - 15.0°C			-20.0 - 15.0°C			
Indoor Unit Connectable	Total Capacity	50 to 130% of outdoor unit capacity																					
	Model / Quantity	City Multi	15 - 140 / 9			15 - 140 / 10			15 - 140 / 12			15 - 140 / 9			15 - 140 / 10			15 - 140 / 12			15 - 200 / 12		
	Mixed System	Branch Box 1 unit	Branch Box*5	15 - 100 / 8			15 - 100 / 8			15 - 100 / 8			15 - 100 / 8			15 - 100 / 8			15 - 100 / 8				
			City Multi	15 - 140 / 5			15 - 140 / 5			15 - 140 / 5			15 - 140 / 5			15 - 140 / 5			15 - 200 / 5				
Branch Box 2 units		Branch Box	15 - 100 / 5			15 - 100 / 5			15 - 100 / 5			15 - 100 / 5			15 - 100 / 5			15 - 100 / 5					
		City Multi	15 - 140 / 3 or 2**4			15 - 140 / 3			15 - 140 / 3			15 - 140 / 3 or 2**4			15 - 140 / 3			15 - 200 / 3					
Sound Pressure Level (measured in anechoic room)	dB <A>	49 / 51			50 / 52			51 / 53			49 / 51			50 / 52			51 / 53			56 / 61			
	Refrigerant Piping Diameter	Liquid Pipe mm	9.52 Flare															9.52**6 Flare					
	Gas Pipe mm	15.88 Flare																					
Fan	Type x Quantity	Propeller Fan x 2																					
	Air Flow Rate	m³/min	110															139					
		L/s	1,883																				
		cfm	3,884																				
Motor Output kW	0.074 + 0.074																						
Compressor	Type x Quantity	Scroll hermetic compressor x 1																					
	Starting Method	Inverter																					
	Motor Output kW	2.9			3.5			3.9			2.9			3.5			3.9			5.3			
External Dimensions (H x W x D)	mm	1,338x1,050x330 (+40)																					
Weight kg	122									125									141				

*1,*2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference
Cooling	27°C DB / 19°C WB	35°C	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

*3 10 to 52°C D.B.: When connecting PKFY-P15/20/25VBM, PFFY-P20/25/32VKM and PFFY-P20/25/32VLE(R)M, PEFY-P-VMA3, M, S and P series indoor unit.

*4 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable indoor units are 2.

*5 At least 2 indoor units must be connected when using branch box.

*6 Liquid pipe diameter: 12.7mm when piping length is more than 60m.

Model	PUMY-P112YKME4(-BS)			PUMY-P125YKME4(-BS)			PUMY-P140YKME4(-BS)													
Power Source	3-phase 380 - 400 - 415V 50Hz																			
Cooling Capacity (nominal)	*1 kW	12.5			14.0			15.5												
	Power Input kW	2.79			3.46			4.52												
	Current Input A	4.99 / 4.74 / 4.57			5.84 / 5.55 / 5.35			7.23 / 6.87 / 6.62												
	EER kW/kW	4.48			4.05			3.43												
Temp. Range of Cooling	Indoor Temp. W.B.	15 to 24°C																		
	Outdoor Temp.*3 D.B.	-5 to 52°C																		
Heating Capacity (nominal)	*2 kW	14.0			16.0			18.0												
	Power Input kW	3.04			3.74			4.47												
	Current Input A	5.43 / 5.16 / 4.98			6.31 / 6.00 / 5.78			7.15 / 6.79 / 6.55												
	COP kW/kW	4.61			4.28			4.03												
Temp. Range of Heating	Indoor Temp. D.B.	15 to 27°C																		
	Outdoor Temp. W.B.	-20 to 15°C																		
Indoor Unit Connectable	Total Capacity	50 to 130% of outdoor unit capacity																		
	Model / Quantity	City Multi	15 - 140 / 9			15 - 140 / 10			15 - 140 / 12											
	Mixed System	Branch Box 1 unit	Branch Box*5	15 - 100 / 8			15 - 100 / 8			15 - 100 / 8										
			City Multi	15 - 140 / 5			15 - 140 / 5			15 - 140 / 5										
Branch Box 2 units		Branch Box	15 - 100 / 5			15 - 100 / 5			15 - 100 / 5											
		City Multi	15 - 140 / 3 or 2**4			15 - 140 / 3			15 - 140 / 3											
Sound Pressure Level (measured in anechoic room)	dB <A>	49 / 51			50 / 52			51 / 53												
	Refrigerant Piping Diameter	Liquid Pipe mm	9.52 Flare															9.52 Flare		
	Gas Pipe mm	15.88 Flare																		
Fan	Type x Quantity	Propeller Fan x 2																		
	Air Flow Rate	m³/min	110															139		
		L/s	1,833																	
		cfm	3,884																	
Motor Output kW	0.074 + 0.074																			
Compressor	Type x Quantity	Scroll hermetic compressor x 1																		
	Starting Method	Inverter																		
	Motor Output kW	2.9			3.5			3.5			3.9									
External Dimensions (H x W x D)	mm	1,338x1,050x330 (+40)																		
Weight kg	136																			

*1,*2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference
Cooling	27°C DB / 19°C WB	35°C	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

*3 10 to 52°C D.B.: When connecting PKFY-P15/20/25VBM, PFFY-P20/25/32VKM and PFFY-P20/25/32VLE(R)M, PEFY-P-VMA3, M, S and P series indoor unit.

*4 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable indoor units are 2.

*5 At least 2 indoor units must be connected when using branch box.

Type	Branch Box									
Model Name	PAC-MK53BC		PAC-MK33BC							
Connectable Number of Indoor Units	Max. 5		Max. 3							
Power Supply	Source	Outdoor power supply, Branch Box / Outdoor separate power supply								
	Outdoor (V/Phase/Hz)	1-phase, 220/230/240V, 50Hz, 1-phase, 220V, 60Hz								
Total Input kW	0.003									
Operating Current A	0.05									
Dimensions H x W x D mm	170 - 450 - 280									
Weight kg	7.4		6.7							
Piping (diameter)	Branch [Indoor Side]	Liquid	6.35 x 5		6.35 x 3		6.35 x 5		6.35 x 3	
		Gas	9.52 x 4, 12.7 x 1		9.52 x 3		9.52 x 4, 12.7 x 1		9.52 x 3	
	Main [Outdoor Side]	Liquid	9.52							
		Gas	15.88							
Connection Method	Flared				Brazed					
Wiring	to Indoor Unit	3-wire + Earth wire								
	to Outdoor Unit	3-wire + Earth wire								

Indoor Unit Compatibility Table

■ MXZ Series R32

Possible combinations of outdoor units and indoor units are shown below.

Indoor Unit		Outdoor Unit	Inverter Models Heat pump type																			
			MXZ-2F33VF ³	MXZ-2F42VF ³	MXZ-2F53VF(H)3 ³	MXZ-3F54VF3 ³	MXZ-3F68VF3 ³	MXZ-4F72VF3 ³	MXZ-4F80VF3 ³	MXZ-2HA40VF ³	MXZ-2HA50VF ³	MXZ-3HA50VF ³										
M series	Wall-Mounted	MSZ-LN18VG(W)(V)(R)(B)				●	●	●	●													
		MSZ-LN25VG(W)(V)(R)(B)				●	●	●	●													
		MSZ-LN35VG(W)(V)(R)(B)				●	●	●	●													
		MSZ-LN50VG(W)(V)(R)(B)																				
		MSZ-LN18VG2(W)(V)(R)(B)	●	●	●	●	●	●	●													
		MSZ-LN25VG2(W)(V)(R)(B)	●	●	●	●	●	●	●													
		MSZ-LN35VG2(W)(V)(R)(B)		●	●	●	●	●	●													
		MSZ-LN50VG2(W)(V)(R)(B)					●	●	●	●												
		MSZ-AP15VG	●	●	●	●	●	●	●													
		MSZ-AP20VG	●	●	●	●	●	●	●													
		MSZ-AP25VG	●	●	●	●	●	●	●													
		MSZ-AP35VG		●	●	●	●	●	●													
		MSZ-AP42VG			●	●	●	●	●													
		MSZ-AP50VG			●	●	●	●	●													
		MSZ-AP60VG																				
		MSZ-EF18VG(W)(B)(S)	●	●	●	●	●	●	●													
		MSZ-EF22VG(W)(B)(S)	●	●	●	●	●	●	●													
		MSZ-EF25VG(W)(B)(S)	●	●	●	●	●	●	●													
		MSZ-EF35VG(W)(B)(S)		●	●	●	●	●	●													
		MSZ-EF42VG(W)(B)(S)			●	●	●	●	●													
		MSZ-EF50VG(W)(B)(S)				●	●	●	●													
	MSZ-BT20VG	●	●	●	●	●	●	●														
	MSZ-BT25VG	●	●	●	●	●	●	●														
	MSZ-BT35VG		●	●	●	●	●	●														
	MSZ-BT50VG																					
	MSZ-HR25VF													●	●	●						
	MSZ-HR35VF													●	●	●						
	MSZ-HR42VF														●	●						
MSZ-HR50VF																				●		
S series	2×2 Cassette	MFZ-KT25VG	●	●	●	●	●	●														
		MFZ-KT35VG		●	●	●	●	●	●													
		MFZ-KT50VG					●	●	●	●												
		MLZ-KP25VF	●	●	●	●	●	●	●													
	1-way Cassette	MLZ-KP35VF		●	●	●	●	●	●													
		MLZ-KP50VF					●	●	●	●												
	Ceiling-Concealed	SLZ-M15FA	●	●	●	●	●	●	●													
		SLZ-M25FA	●	●	●	●	●	●	●													
		SLZ-M35FA		●	●	●	●	●	●													
		SLZ-M50FA					●	●	●	●												
SEZ-M25DA ^{*2}		●	●	●	●	●	●	●														
SEZ-M25DAL ^{*2}		●	●	●	●	●	●	●														
SEZ-M35DA			●	●	●	●	●	●														
SEZ-M35DAL			●	●	●	●	●	●														
SEZ-M50DA						●	●	●	●													
SEZ-M50DAL						●	●	●	●													
P series	Ceiling-Suspended	SEZ-M60DA					●	●	●													
		SEZ-M60DAL						●	●	●												
		PCA-M50KA					●	●	●	●												
	Ceiling-Concealed	PCA-M60KA						●	●	●												
		PCA-M71KA																				
		PEAD-M50JA					● ^{*1}	● ^{*1}	● ^{*1}	●												
		PEAD-M50JAL					● ^{*1}	● ^{*1}	● ^{*1}	●												
		PEAD-M60JA																				
PEAD-M60JAL																						
PEAD-M71JA																						
PEAD-M71JAL																						

*1 Maximum total current of indoor units: 3A or less.

*2 SEZ-M25 cannot be connected with MXZ-2F/3F/4F when total capacity of connected indoor units is equivalent to outdoor capacity (capacity ratio is 1).

*3 MXZ outdoor units are not designed to operate with a single indoor unit with one-to-one piping work. Please install at least two indoor units.

MXZ Series R410A

Possible combinations of outdoor units and indoor units are shown below.

Indoor Unit		Outdoor Unit	Inverter Models Heat pump type												
			MXZ- ⁻³ 2D33VA	MXZ- ⁻³ 2D42VA2	MXZ- ⁻³ 2D53VA(H)2	MXZ- ⁻³ 2E53VAHZ	MXZ- ⁻³ 3E54VA	MXZ- ⁻³ 3E68VA	MXZ- ⁻³ 4E72VA	MXZ- ⁻³ 4E83VA	MXZ- ⁻³ 4E83VAHZ	MXZ- ⁻³ 5E102VA	MXZ- ⁻³ 6D122VA2	MXZ- ⁻³ 2DM40VA	MXZ- ⁻³ 3DM50VA
M series	Wall-Mounted	MSZ-LN18VG(W)(V)(R)(B)													
		MSZ-LN25VG(W)(V)(R)(B)	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-LN35VG(W)(V)(R)(B)		●	●	●	●	●	●	●	●	●	●		
		MSZ-LN50VG(W)(V)(R)(B)													
		MSZ-AP15VG	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-AP20VG	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-AP25VG ^{*7}	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-AP35VG ^{*7}		●	●	●	●	●	●	●	●	●	●		
		MSZ-AP42VG ^{*7}			●	●	●	●	●	●	●	●	●		
		MSZ-AP50VG ^{*7}			●	●	●	●	●	●	●	●	●		
		MSZ-FH25VE2	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-FH35VE2		●	●	●	●	●	●	●	●	●	●		
		MSZ-FH50VE2					●	●	●	●	●	●	●		
		MSZ-EF18VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-EF22VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-EF25VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-EF35VG(W)(B)(S)		●	●	●	●	●	●	●	●	●	●		
		MSZ-EF42VG(W)(B)(S)			●	●	●	●	●	●	●	●	●		
		MSZ-EF50VG(W)(B)(S)			●	●	●	●	●	●	●	●	●		
		MSZ-SF15VA	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-SF20VA	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-SF25VE3	●	●	●	●	●	●	●	●	●	●	●		
		MSZ-SF35VE3		●	●	●	●	●	●	●	●	●	●		
		MSZ-SF42VE3			●	●	●	●	●	●	●	●	●		
	MSZ-SF50VE3			●	●	●	●	●	●	●	●	●			
	MSZ-GF60VE2						●	●	●	●	●	●			
	MSZ-GF71VE2							●	●	●	●	●			
	MSZ-DM25VA													●	●
	MSZ-DM35VA													●	●
	MSZ-HJ25VA													●	●
MSZ-HJ35VA													●	●	
MSZ-HJ50VA														●	
Floor-Standing	MFZ-KJ25VE2	● ^{*4*5}	● ^{*4}	● ^{*4}	●	● ^{*4}	● ^{*4}	●	●	●	●	●			
	MFZ-KJ35VE2		● ^{*4}	● ^{*4}	●	● ^{*4}	● ^{*4}	●	●	●	●	●			
	MFZ-KJ50VE2				●	● ^{*4}	● ^{*4}	●	●	●	●	●			
1-way Cassette	MLZ-KP25VF	●	●	●	●	●	●	●	●	●	●	●			
	MLZ-KP35VF		●	●	●	●	●	●	●	●	●	●			
	MLZ-KP50VF				●	●	●	●	●	●	●	●			
S series	2x2 Cassette	SLZ-M15FA													
		SLZ-M25FA	●	●	●	●	●	●	●	●	●	●			
		SLZ-M35FA		●	●	●	●	●	●	●	●	●			
		SLZ-M50FA				●	●	●	●	●	●	●			
	Ceiling-Concealed	SEZ-M25DA ^{*2}	●	●	●	●	●	●	●	●	●	●			
		SEZ-M25DAL ^{*2}	●	●	●	●	●	●	●	●	●	●			
		SEZ-M35DA		●	●	●	●	●	●	●	●	●			
		SEZ-M35DAL		●	●	●	●	●	●	●	●	●			
		SEZ-M50DA				●	●	●	●	●	●	●			
		SEZ-M50DAL				●	●	●	●	●	●	●			
		SEZ-M60DA					●	●	●	●	●	●			
		SEZ-M60DAL					●	●	●	●	●	●			
		SEZ-M71DA						●	●	●	●	●			
		SEZ-M71DAL							●	●	●	●			
P series	4-way Cassette	PLA-M50EA				●	●	●	●	●	●	●			
		PLA-M60EA					●	●	●	●	● ^{*6}	●	●		
		PLA-M71EA							●	●	● ^{*6}	●	●		
	Ceiling-Suspended	PCA-M50KA				●	●	●	●	●	● ^{*6}	●	●		
		PCA-M60KA					●	●	●	●	● ^{*6}	●	●		
		PCA-M71KA							●	●	● ^{*6}	●	●		
	Ceiling-Concealed	PEAD-M50JA					● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}		
		PEAD-M50JAL					● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}		
		PEAD-M60JA								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}		
		PEAD-M60JAL								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}		
								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}				
								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}				

*1 Maximum total current of indoor units: 3A or less.

*2 SEZ-KD25 cannot be connected with MXZ-2D(E)/3E/4E/5E when total capacity of connected indoor units is equivalent to outdoor capacity (capacity ratio is 1).

*3 MXZ outdoor units are not designed to operate with a single indoor unit with one-to-one piping work. Please install at least two indoor units.

*4 When connecting the MFZ-KJ Series indoor unit, additional refrigerant is required. For details, please refer to page 104.

*5 Regarding MXZ-2D33, the second unit should be a different type in the case of selecting one MFZ-KJ.

*6 P series cannot be connected with MXZ-4E83VAHZ when ampere limit adjustment function is operated.

*7 Connectable outdoor unit are MXZ-2D33VA-E4, MXZ-2D42VA2-E4, MXZ-2D53VA2-E4, MXZ-2E53VAHZ-E2, MXZ-3E54VA-E2, MXZ-3E68VA-E2, MXZ-4E72VA-E2, MXZ-4E83VA-E4, MXZ-4E83VAHZ-E3, MXZ-5E102VA-E4.

■ PUMY-SP Series

Branch Box Connection Compatibility Table

Series	Type	Model Name	Capacity										
			15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG					●	●		●*1			
		MSZ-AP•VG	●*1		●*1		●*1	●*1	●*1	●*1			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG		●*1		●*1	●*1	●*1	●*1	●*1			
		MSZ-SF•VA	●		●								
		MSZ-SF•VE3					●	●	●	●			
	MSZ-GF•VE2										●	●	
	Floor-Standing	MFZ-KJ•VE2					●*1	●*1		●*1			
	1-way Cassette	MLZ-KP•VF					●*1	●*1		●*1			
S series	Ceiling-Concealed	SEZ-M•DA(L)					●*1	●*1		●*1	●*1	●*1	
	2x2 Cassette	SLZ-M•FA	●*1				●*1	●*1		●*1			
P series	Ceiling-Suspended	PCA-M•KA						●		●	●	●	●
	4-way Cassette	PLA-M•EA						●*1		●*1	●*1	●*1	●*1
	Ceiling-Concealed	PEAD-M•JA(L)								●*1	●*1	●*1	●*1

*1 Connectable outdoor units are PUMY-SP112/125/140V(Y)KMR1(-BS).TH only.

LEV Kit Connection Compatibility Table

Series	I/U Type	Model Name	Capacity										
			15	18	20	22	25	35	42	50	60	71	
M series	Wall-Mounted	MSZ-LN•VG					●	●		●			
		MSZ-AP•VG	●*1		●*1		●*1	●*1	●*1	●*1			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG		●		●	●	●	●	●			
		MSZ-SF•VA	●		●								
		MSZ-SF•VE3					●	●	●	●			

*1 Connectable outdoor units are PUMY-SP112/125/140V(Y)KMR1(-BS).TH only.

CITY MULTI Indoor Unit Compatibility Table

Series	Type	Model Name	Capacity													
			P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140	
CITY MULTI series	1-way Cassette	PMFY-P•VBM-E			●	●	●	●								
	2-way Cassette	PLFY-P•VLM-D-E			●	●	●	●	●	●		●	●	●		
	4-way Cassette	PLFY-P•VEM-E			●	●	●	●	●	●		●	●	●		
		PLFY-EP•VEM-E *3								●	●		●			
	2x2 Cassette	PLFY-P•VFM-E1		●	●	●	●	●	●							
	Ceiling Concealed	PEFY-P•VMS1(L)-E		●	●	●	●	●	●	●						
		PEFY-P•VMA(L)-E3 *2			●	●	●	●	●	●	●	●	●	●	●	●
		PEFY-P•VMA3-E *1				●	●	●	●							
		PEFY-P•VMH-E					●	●	●	●	●	●	●	●	●	●
		PEFY-P•VMR-E-L/R			●	●	●									
	PEFY-P•VMH-E-F											●			●	
	Ceiling Suspended	PCFY-P•VKM-E							●		●		●	●		
	Wall Mounted	PKFY-P•VLM-E	●	●	●	●	●	●	●							
		PKFY-P•VKM-E									●		●			
	Floor Standing	PFFY-P•VLEM-E			●	●	●	●	●	●	●					
	Floor Mounted	PFFY-P•VKM-E2			●	●	●	●								
Concealed	PFFY-P•VLRM-E			●	●	●	●	●	●	●						
Lossnay	GUF•RD(H)4 *2								●				●			

*1 Authorized connectable indoor units are as follows:
 PUMY-SP112: PEFY-P25x2+P32x2, PUMY-SP125: PEFY-P25x1+P32x3, PUMY-SP140: PEFY-P32x2+P40x2
 *2 Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)
 *3 PLFY-EP can not connect more than 3units

■ PUMY-P Series

Branch Box Connection Compatibility Table

Series	Type	Model Name	Capacity										
			15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG					●	●		●			
		MSZ-AP•VG	●		●		●	●	●	●			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG		●		●	●	●	●	●			
		MSZ-SF•VA	●		●								
		MSZ-SF•VE3					●	●	●	●			
	MSZ-GF•VE2										●	●	
Floor-Standing	MFZ-KJ•VE2					●	●		●				
1-way Cassette	MLZ-KP•VF					●	●		●				
S series	Ceiling-Concealed	SEZ-M•DA(L)					●	●		●	●	●	
	2x2 Cassette	SLZ-M•FA	●				●	●		●	●	●	●
P series	Ceiling-Suspended	PCA-M•KA						●		●	●	●	●
	4-way Cassette	PLA-M•EA						●		●	●	●	●
	Ceiling-Concealed	PEAD-M•JA(L)								●	●	●	●

LEV Kit Connection Compatibility Table

Series	I/U Type	Model Name	Capacity										
			15	18	20	22	25	35	42	50	60	71	
M series	Wall-Mounted	MSZ-LN•VG					●	●		●			
		MSZ-AP•VG	●		●		●	●	●	●			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG		●		●	●	●	●	●			
		MSZ-SF•VA	●		●								
	MSZ-SF•VE3					●	●	●	●				
Floor-Standing	MFZ-KJ•VE2					●	●		●				

CITY MULTI Indoor Unit Compatibility Table

Series	Type	Model Name	Capacity												
			P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140
CITY MULTI series	1-way Cassette	PMFY-P•VBM-E			●	●	●	●							
	2-way Cassette	PLFY-P•VLM-D-E			●	●	●	●	●	●		●	●	●	
	4-way Cassette	PLFY-P•VEM-E			●	●	●	●	●	●		●	●	●	
		PLFY-EP•VEM-E*4							●	●		●			
	2x2 Cassette	PLFY-P•VFM-E1		●	●	●	●	●	●						
	Ceiling Concealed	PEFY-P•VMS1(L)-E	●	●	●	●	●	●	●	●					
		PEFY-P•VMA(L)-E3			●	●	●	●	●	●	●	●	●	●	●
		PEFY-P•VMA3-E*1				●	●	●	●	●		●		●	●
		PEFY-P•VMH-E					●	●	●	●	●	●	●	●	●
		PEFY-P•VMR-E-L/R			●	●	●								
	PEFY-P•VMH-E-F											●			●
	Ceiling Suspended	PCFY-P•VKM-E							●		●		●	●	
	Wall Mounted	PKFY-P•VLM-E	●	●	●	●	●	●	●						
		PKFY-P•VKM-E									●		●		
	Floor Standing Floor Mounted Concealed	PFFY-P•VLEM-E			●	●	●	●	●	●					
		PFFY-P•VKM-E2			●	●	●	●	●						
		PFFY-P•VLRM-E			●	●	●	●	●	●					
PFFY-P•VLRMM-E				●	●	●	●	●	●	●					
Air to Water unit	PWFY-P•VM-E1/E2-AU*2											●			
Lossnay	GUF•RD(H)4*3								●			●			

*1 Authorized connectable indoor units are as follows;

PUMY-P112: PEFY-P25x2+P32x2, PUMY-P125: PEFY-P32x4, PUMY-P140: PEFY-P32x3+P40x1, PUMY-P200YKM2: PEFY-P40x2+P63x2

*2 Note that connection is not allowed inside EU countries.

PWFY can not connect to PUMY-P200YKM2.

*3 Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)

*4 PUMY-P112/125/140: PEFY-EP can not connect more than 3 units

PUMY-P200: Authorized connectable indoor units are only as follows; PEFY-EP63VEM-E x3.